


Replacement by Manufacturer & Model Number

HEAD REPLACEMENT BY RECORDER MANUFACTURER AND MODEL NO.

1. Look up particular machine, Model No. and track style to determine the correct replacement heads.
2. Head No. is followed by QK mount when needed. Subsequent head replacements will usually not require another QK.
3. Consult REFERENCE NOTES on inside back cover as indicated by number in second column.

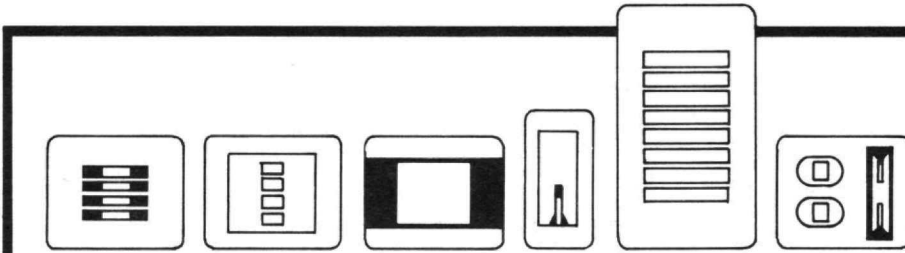

Model No.	Track Style & Notes	Ref.	RP or RPE	RP or RPE Head & QK	Record Head & QK	Playback Head & QK	Erase Head & QK
ADMIRAL							
CTR400,A	2M - None - Cass.						
CTR410,A	2M - None - Cass.						
CTR450	2M		RP	5140A			NONE
CTR571	2M		RP	5140A			NONE
CTR591	2M		RP	NONE			NONE
CTR878	2M - 39		RP	5140A			NONE
CTR888 (8A6A)	2M - 39		RP	5140A			NONE
CTRF510	2M - NONE						
CTRF581	2M - 39		RP	5140A			NONE
CTRF898 (8S6)	2M		RP	5140A			NONE
KS653	8S					5800	
KS658	8S					5800	
KS661M	8S					5800	
KS663M	8S					5800	
KS665M	8S					5800	
KS803	8S					5800	
KS821	8S					5800	
KS823	8S					5800	
KS828	8S					5800	
KS833	8S					5800	
KS843	8S					5800	
KS843M	8S					5800	
KS883	8S					5800	
MS6201T	8S - 39					5800	
SK678M	8S					5800	
STP631	8S		P			5800	
STP801	8S - 39					5800	
STP802	8S - 39					5800	
STP931	8S					5800	
STR671	4S		RP	NONE			NONE
TP360	2M - 39		P			5140A	
TR100	2M - 83		RP	3101			3600+19
TR200	2M - 83		RP	3101			3600+19
6MSA	8S					5800	
8G6A	8S					5800	
8T6	8S - 39					5800	
8Y6	8S					5800	
750C838-109	8S					5800	
750D1534-1	8S					5800	

ADVENT							
201	4S		RP	5230A			NSI
202	4S		RP	5230A			NSI

AIKO							
ATP-702U	2M - 39		RP	5140A			NONE
ATP-703	2M - 39		RP	5140A			NONE
ATP-704U	2M		RP	5140A			NONE
ATP-707	2M		RP	5132			NONE
ATPR-401R	2M - 39		RP	5140A			NONE
ATPR-406U	2M		RP	NONE			NONE
ATPR-4014	2M - 39		RP	5140A			NONE

AIRCASTLE							
CP305	2M		RP	NONE			NONE
TCT601C	2M		RP	NONE			NONE
TMC70	2M		RP	NONE			NONE
TR1040	4S		RP	1207+66			1408+18
YTC971A	2M						NONE

AIRLINE (WARDS) See also TELECTRO							
FMV16600A	4S - NONE						
FMV16647A	8S - NONE						
GAA2032A	8S					5800	
GCI2010A	8S-39					5801	
GCI2541A	8S		P			5800	
GEN2861A	8S		P			NONE	
GEN3628A	2M - 2, 79		RP	3101			3600+19
GEN3638A	2M - 2		RP	3101			3600+19
GEN3639	2M		RP	NONE			
GEN3647A	2M - 2		RP	3101			3600+19
GEN3657A	2M - 2		RP	3101			
GEN3658A	2M - 2			3101			
GEN3699A	4S		RP	1202+66			1408+19
GEN3913A	2M - 39		RP	5140A			NONE

AIRLINE (WARDS) (Continued)							
GEN3920	2M - 39		RP	5140A			NONE
GEN3930A	2M - 75		RP	5140A			NONE
GEN3940A	2M		RP	NONE			NONE
GEN3960A	4S		RP	5230A			5211
GEN3970A	8S		P				NONE
GEN3975A	8S		P				NONE
GEN6232A	8S - 39						5800
GEY2022B	8S - 39						5801
GEY2052B	8S - 39						5801
GEY2063	8S - 39						5800
GEY2073	8S - 39						5800
GEY2083A	8S - 39						5801
GEY2143	8S - 39						5800
GEY2163	8S - 39						5800
GEY2224A	8S						5800
GEY2224B	8S						5800
GEY2323	8S - 39						5800
GEY23231	8S						5800
GEY2324A	8S						5800
GEY2353	8S - 39						5800
GEY23531	8S						5800
GEY2354A	8S						5800
GEY2354B	8S						5800
GEY2623B	8S - 39						5801
GEY2653A	8S - 39						5801
GIM2042A	8S - 39						5800
JWR2072B	8S - 39						5800
JWR3697A	4S		RP	1201+66			1408+19
795	2M		RP	3101+20			NONE
880	2M		RP	3101+20			NONE
2011	4S - 39		RP	5230A			
3668A, B	4S		RP	1202+66			1408+19
3678A, B	4S		RP	1202+66			1408+19

AIWA							
Micro 40	4S		P			5230A	
TAR104	2M		RP	5140A			NONE
TP710	2M - 2		RP	3201			3600+19
TP712	2M - 2		RP	3201			3600+19
TP725	2M		RP	5140A			NONE
TP728	2M - NONE						
TP736	2M		RP	NONE			
TP737	2M - NONE						
TP739	2M		RP	NONE			
TP741	4S		RP	5140A			NONE
TP1001	4S		RP	1202+102			1402+19
TP1002	4S		RP	1202+66			1400+19
TP1006	4S				1203	1207	1402+19
TP1009	4S		RP	5230A			NONE
TP1011	4S				1203	1207	1402+19
TP1012	4S - 23		RP	1207+L5			1402+18
TP1023	4S - 39		P				5230A
TP1028	8S		P				5800
TP1028	4T4C		P				5400
TP7195	2M		RP	8408+102			NSI
TPR101	2M		RP	5140A			NONE
30	2M - 23		RP	3101			3600+18
40	2M		RP	3201+21			NONE
50	2M - 23		RP	3101			3600+18
60	2M - 23		RP	3101			3600+18
701	2M		RP	3101			3601
703	2M - 2, 23		RP	3101			3600+18
704	2M		RP	8403+66			3600+19
706	2M		RP	3201+21			3600+19
707	2M - 2		RP	3202			3600+19
708	2M		RP	3200+21			3600+19
801	2M		RP	3101+21			3601+19
3637A	2M - 2		RP	3101			3600+19
3647A	2M		RP	3101			3600+19
AKAI							
M-6	4S - 114		RP	1201+116			8704+116
M-8	4S - 114, 115		RP	1200+38			8704+38
GX220D	4S - 114, 115		RP	8601+38			NSI